



Z5755-U

Omni-Flo™ Top Spud Urinal
0.125 - 1.0 GPF

TAG _____

Architectural/Engineering Specification:

0.125 gpf to 1.0 gpf vitreous china, wall hung, integral trap, washdown urinal complete with 3/4" top spud connection, concealed universal retrofit wall bracket, 2" outlet connection and vandal resistant outlet strainer.



Product Features:

- 0.125 - 0.5 gpf [0.5 - 1.9 Lpf]
- Vitreous china
- Asymmetric backwall resulting in reduced splash back
- Patent Pending
- High efficiency washdown flushing action
- Oversized footprint to make retrofit easy
- 3/4" top spud
- 2" I.P.S. outlet flange and rubber gasket with integral trap
- 14" extended rim for handicap compliance when installed at proper height
- Vandal resistant outlet strainer included
- Shipping Weight: 60 lbs.



Recommended Trim:

- ZTR6203-ULF-LL Sensor Long Life Battery Operated Urinal Flush Valve 0.125 gpf [0.5 Lpf].
- ZTR6203-QRT-LL Sensor Long Life Battery Operated Urinal Flush Valve 0.25 gpf [1.0 Lpf].
- ZTR6203-EWS-LL Sensor Long Life Battery Operated Urinal Flush Valve 0.5 gpf [1.9 Lpf].
- ZTR6003AV-WS1-LL Sensor Long Life Battery Operated Urinal Flush Valve 1.0 gpf [3.8 Lpf].

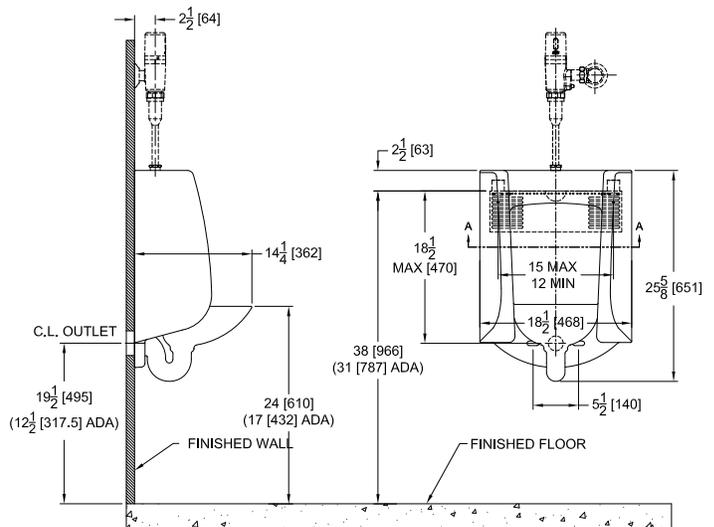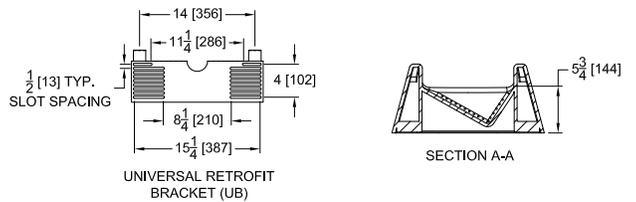

Rough-in/Overview dimensions for Z5755 Series

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Compliance and Certification:

- ADA Compliant
- WaterSense Compliant



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. Fixture dimensions meet ASME A112.19.2/CSA B45.1 requirements. In Canada - Consult local codes and standards.