


**ZCF121**

Ø12 [305] CONTROL-FLO ROOF DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

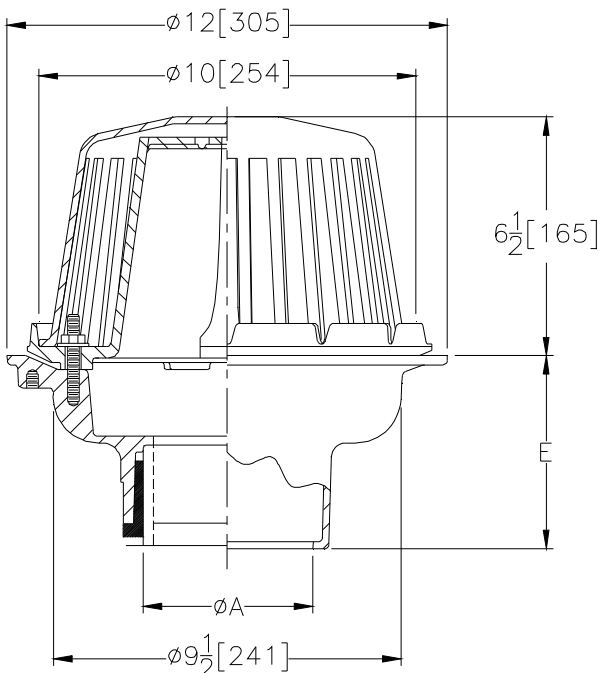

A Pipe Size In. [mm]	Approx. Wt. Lb. [kg]	Dome Open Area Sq. In. [cm²]
2,3,4 [51,76,102]	22 [10]	78 [503]
6 [152]		

ENGINEERING SPECIFICATION: ZURN ZCF121

12" [305mm] diameter "Control-Flo" roof drain for dead-level roof construction, Dura-Coated cast iron body. Combination membrane flashing clamp/gravel guard, aluminum "Control-Flo" weir, and Poly-Dome. "Control-Flo" weir shall be linear functioning with flow rate of 5 GPM [23 LPM] per inch of water buildup above drain. All data shall be verified proportional to flow rates.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

2,3,4,6 [51,76,102,152]
2,3,4,6 [51,76,102,152]
2,3,4,6 [51,76,102,152]
2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-5/8 [117]

PREFIXES

_____ Z D.C.C.I. Body with Poly-Dome*
_____ ZA D.C.C.I. Body with Aluminum Dome

SUFFIXES

_____ -A Waterproof Flange
_____ -AR Acid Resistant Epoxy Coated Finish
_____ -C Underdeck Clamp
_____ -DP Top Set® Roof Deck Plate (Replaces both the
_____ -DR Adjustable Drain Riser Extension Assembly
_____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
_____ -EB Elevating Body Plate
_____ -G Galvanized Cast Iron

_____ -R Roof Sump Receiver
_____ -SC Secondary Clamp Collar
_____ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102]
_____ -VP Vandal Proof Secured Top
_____ -90 90° Threaded Side Outlet Body
_____ (2,3,4 [51,76,102])

* Regularly furnished unless otherwise specified.