


Engineering Specifications: Zurn AquaSpec® Z826X1-AF

Polished chrome plated deck mounted faucet with an integral shank, quarter turn ceramic disc cartridges, a mixing yoke with check stop inlets and 2-1/2" [64mm] vandal resistant color-coded metal lever handles. Unit is furnished with a 24" [610mm] riser with a 36" [914mm] stainless steel spring hose, a self-closing 1.6 GPM @ 60 psi (6.1 L/min. @ 400 kPa) pre-rinse hand held valve with an insulated 6" [152mm] handle, a stay open clip, a pipe support, hose hook, and a single valve Adapta faucet with a 9-1/2" [241mm] tubular brass swing spout with a single screen outlet, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers.

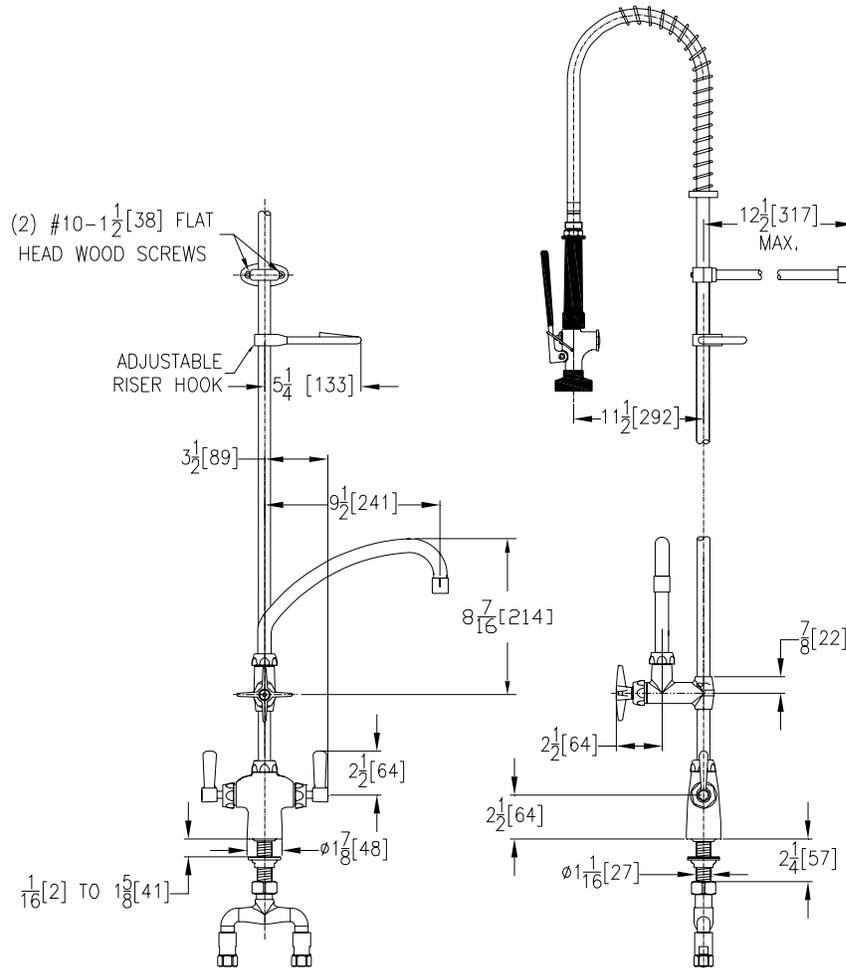

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

Suffix Description

- ___ -AR Anti-Rotation Pins
- ___ -G 1-1/4" [32mm] Grid Strainer Drain
- ___ -HCT Hot/Cold Text Indexes
- ___ -PR2 Pre-rinse with Angle Spray Head, Rubber Bumper Spray Outlet and Self-closing Valve
- ___ -PR3 Pre-rinse with Angled Aerated Outlet and Self-closing Valve
- ___ -PT 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292