


TAG

## **Concealed ZER6197AV Model**

## Battery Powered Automatic Sensor Flush Valve For Urinals with 3/4" Top Spud Connection

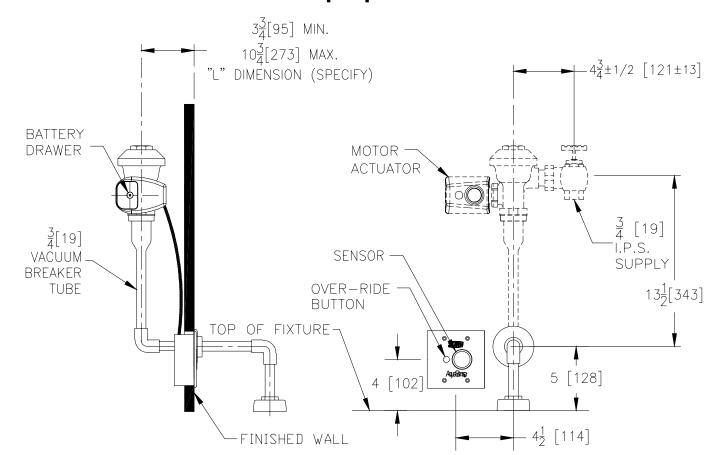

Flow Options	
☐ -WS1	1.0 Gal. Low Consumption
Standard Flush	1.5 Gallons Per Flush
Suffix Options (Check/Specify Appropriate Options)	
Other	
This space is for Architectural/engineering Approval	

ENGINEERING SPECIFICATION: ZURN ZER6197AV AquaSense 'AV' Concealed Battery Powered Automatic Sensor Flush Valve For Urinals with 3/4" Top Spud Connection - Concealed, quiet diaphragm-type, rough brass, flushometer valve with Zurn's AquaVantage TPE, chloramine resistant, dual seal diaphragm with a clog resistant triple filtered bypass. The valve incorporates a 6 VDC motorized actuator, a battery powered automatic sensor with a manual push-button override, high back pressure vacuum breaker, one piece hex coupling nut and adjustable tailpiece, spud coupling and flange for top spud connection. Switchable sensor features include 24 hour auto flush and diagnostic indicator lights. Control stop has internal siphon-guard protection, and a sweat solder kit. Internal seals are made of chloramine resistant materials.

ZURN INDUSTRIES, INC. ◆ COMMERCIAL BRASS OPERATION ◆ 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330
Phone: 1-800-997-3876 ◆ Fax: 919-775-3541 ◆ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ◆ 3544 Nashua Drive ◆ Mississauga, Ontario L4V1L2 ◆ Phone: 905-405-8272 Fax: 905-405-1292