


TEMP-GARD III TUB AND SHOWER UNIT

Z7302-SS-MT-DV2P-HW-H9-S9

TAG		

ENGINEERING SPECIFICATIONS: ZURN Z7302-SS-MT-DV2P-HW-H9-S9

Single handle pressure balancing mixing tub and shower unit, ceramic control cartridge with stainless steel balancing piston, built in reverse connection capability (To reverse the hot and cold inlets simply remove cartridge and turn 180°), two service stops / check stops, and adjustable limit stop. When valve is turned on it must rotate from cold through to the hot position. All exposed trim and handle are metal with polished nickel chrome plated surface. The valve is supplied with a two-way brass diverter valve, 60" flexible metal hose, 24" mounting bar, supply elbow and flange, -H9 1.6 GPM hand held shower head, -S9 1.5 GPM shower head, arm, flange, and (T2) diverter tub spout with chrome plated finish. The valve body is a four port valve with a tub port plug included for shower only applications. The valve inlets, shower and tub outlet are all standard with 1/2" NPT female thread connections. The 1/2" copper sweat options must be specified as shown below.

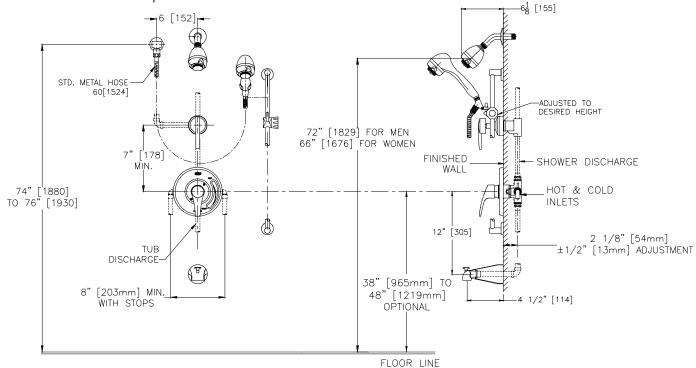

Note: All dimensions are for reference only. Do not use for pre-plumbing. Parts shown as hidden lines are supplied by others.

Fails s	nown as modern lines are supplied by others.	
OPTIONS (C	Check/specify appropriate options) Use with Z7300 prefix	
Suffix	Description	
CPVC	1/2" Male NPT by CPVC Female Adaptors, shipped loose to be	
	installed in the field.	
EXT	Extension Kit, Extends Valve Out by 1".	
PEX	1/2" Male NPT by PEX Adaptors, shipped loose to be installed	
	in the field.	
SSC	1/2" Female Copper Sweat Connections w/ Service Stops	
ST	Sierra Series Decorative Metal Trim	
WF	Wall Mounting Flange For Fiberglass or Panel Wall Installation	
	Handwall Options (See Z7000-HW)	
Additional Options		

Pair of Dual Spring Check Valves

Large Brass Shower Head with Spray Adjustment

Small Brass Shower Head with Spray Adjustment

STANDARDS

Tested to meet the following standards for valves and plumbing fittings:
ASSE Standard No. 1016
ASME A112.18.1 / CSA B125.1

IAPMO[®] Listed





ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

AquaSpec® is a registered trademark of Zurn Industries, LLC ©2010 Zurn Industries, LLC

Z7000-SC

Z7000-S5

Z7000-S6

Dwg. No. 93500

Rev. B

Date: 7/18/11 C.N. No.127914 Product No. Z7302-SS-MT-DV2P-HW-H9-S9