




Z1736

12 [305] DIAMETER EXTRA HEAVY-DUTY FLOOR DRAIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

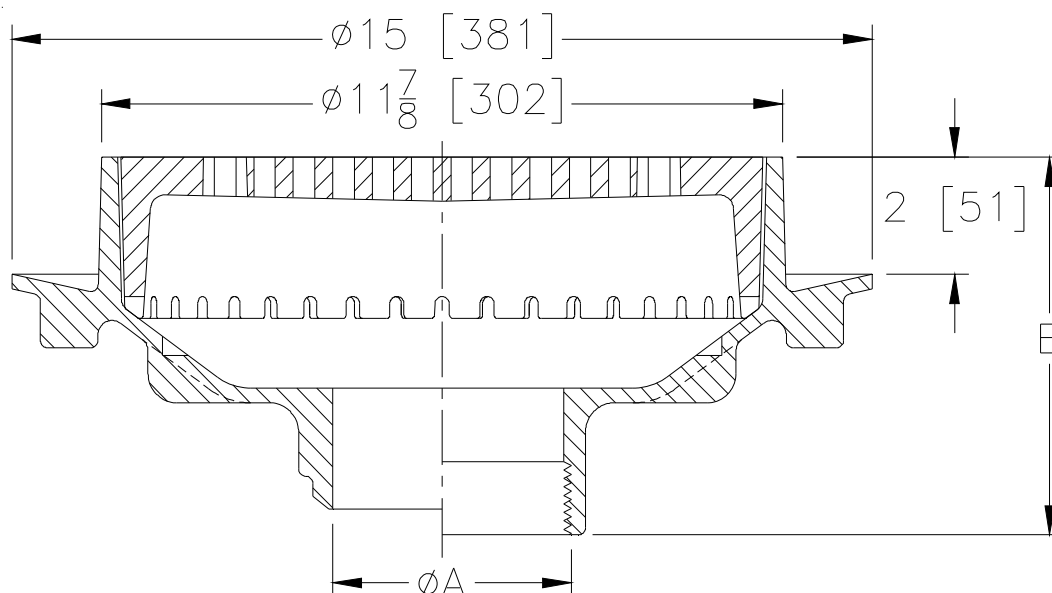

A- Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
3, 4, 6 [76, 102, 152]	61 [28]	34 [219]

ENGINEERING SPECIFICATION: ZURN Z1736

12" [305mm] Diameter extra heavy-duty floor drain, All Type 304 (CF8) stainless steel body with integral anchor flange and deep flange grate with plain finish.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3, 4, 6 [76, 102, 152]

(Specify size/type) OUTLET

____ BW Butt-weld
(Specify Schedule 10 or 40)
____ IP Threaded

'E' BODY HT. DIM.

6 [152]

3, 4, 6 [76, 102, 152]

6-7/16 [164]

PREFIXES

____ Z Type 304 (CF8) Stainless Steel*
____ ZM Type 316 (CF8M) Stainless Steel

SUFFIXES

____ -K Seepage Holes Only
____ -KC Clamp Collar with Seepage Holes
____ -TS Top Secured with Slotted Screw
____ -VP Vandal-Proof Secured Top
____ -Y Sediment Bucket
____ -30 Bronze Closure Plug
____ -33 Type 304 Stainless Steel Closure Plug

* Regularly furnished unless otherwise specified.