




ZN-415-BF
BODY ASSEMBLY
WITH "TYPE BF" STRAINER TAG _____

SPECIFICATION SHEET



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

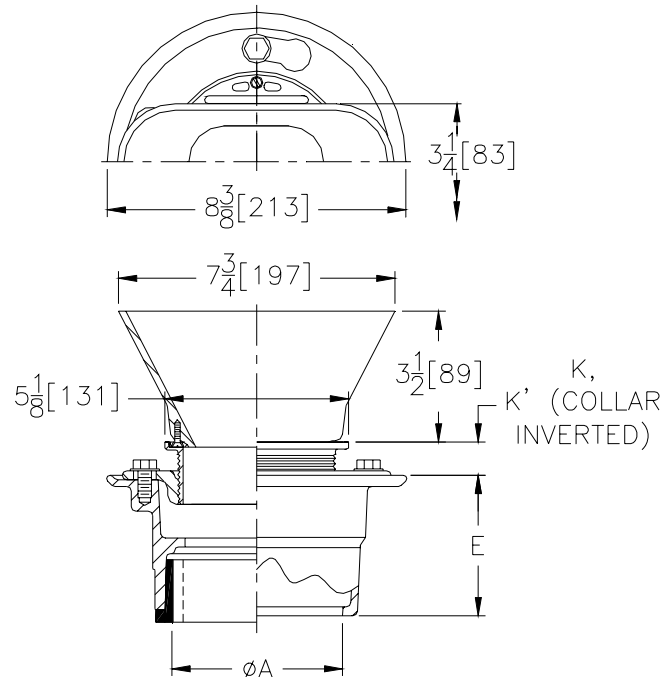

Str. Desig	Dimensions In Inches / [mm]						Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	Str. Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-BF	2-3-4-6 [51-76-102-152]	3-1/4 x 8 [83 x 203]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	12 [5]	3 [19]

ENGINEERING SPECIFICATION: ZURN ZN-415-BF Oval Funnel Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type BF" polished nickel bronze open throat oval funnel grate with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -FS Floating Slab
_____ -G Galvanized Cast Iron
_____ -P 1/2" [13mm] Trap Primer Connection
_____ -U 1" [25mm] - 3" [76mm] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket
_____ -6NH 6" [152mm] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51mm], 3" [76mm] or 4" [102mm] Side
Outlet Body Assembly (IP or NH only)

REV. A **DATE: 06/16/05** **C.N. NO. 89831**

DWG. NO. 63639 **PRODUCT NO. ZN-415-BF**

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED