



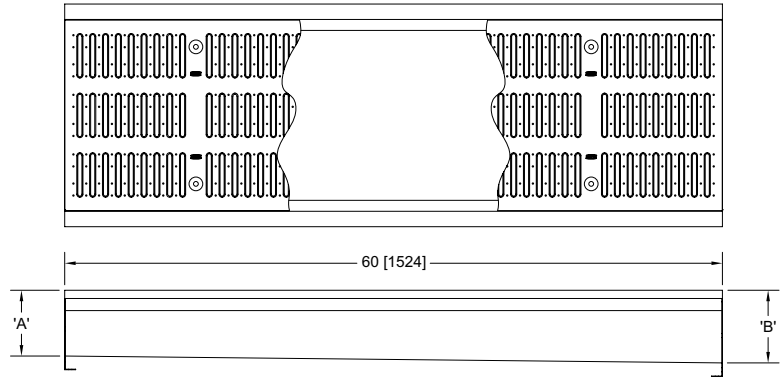
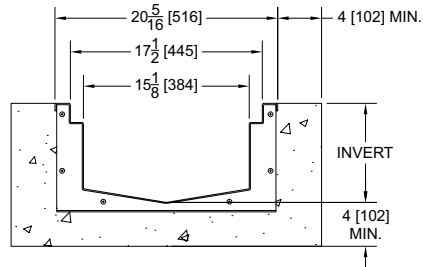
Z898

18 [457] WIDE TRENCH DRAIN SYSTEM

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE
ENCASEMENT AND REINFORCING BASED UPON APPLICATION
AND LOCAL CODES

NOTE: Custom invert minimum of 4 [102].

ENGINEERING SPECIFICATION: ZURN Z898

18 [457] Wide Pre-Sloped Trench Drainage System with 1/8' per foot slope.
#12 Gage Type 304 Stainless Steel drain channel with bolted flanged
connection complete with rubber flange gasket, and stamped stainless
steel grate.

OPTIONS (Check/specify appropriate options)**PREFIXES**

___ Z #12 Gage Type 304 Stainless Steel Trench
with Stamped Stainless Steel Grate.*

SUFFIXES

___ -DB Bottom Drop in Bucket
___ -E1 Closed End Cap
___ -E3 3" No-Hub End Outlet
___ -E4 4" No-Hub End Outlet
___ -E6 6" No-Hub End Outlet
___ -E8 8" No Hub End Outlet
___ -FS Fabricated Stainless Steel Slotted Grate
___ -GG Fiberglass Grate
___ -K Anchor Flange
___ -KC Clamp Collar and Pan
___ -PS Perforated Stainless Steel Grate
___ -RFS Reinforced Stainless Steel Slotted Grate
___ -RPS Reinforced Stainless Steel Perforated Grate
___ -SBG Stainless Steel Bar Grate
___ -U2 2" No-Hub Bottom Outlet
___ -U3 3" No-Hub Bottom Outlet
___ -U4 4" No-Hub Bottom Outlet
___ -U6 6" No-Hub Bottom Outlet
___ -U8 8" No Hub Bottom Outlet
___ -VP Vandal-Proof Secured Grate/Cover

Channel Number	Overall Depth**		Max. Flow Rate (GPM)	Approx. Wt. Lbs. [kg]
	A Min.	B Max.		
89801	6.00	6.63	640	60
89802	6.63	7.25	805	62
89802N	7.25	7.25	-	64
89803	7.25	7.88	982	65
89804	7.88	8.50	1167	67
89804N	8.50	8.50	-	68
89805	8.50	9.13	1361	69
89805	9.13	9.75	1562	72
89806	9.75	9.75	-	73
89806N	9.75	10.38	1769	74
89807	10.38	11.00	1982	76
89808	11.00	11.00	-	77
89808N	11.00	11.63	2200	78
89809	11.63	12.25	2423	81
89810	12.25	12.25	-	82
89810N	12.25	12.88	2651	83
89811	12.88	13.50	2882	85
89812	13.50	13.50	-	86
89812N	13.50	14.13	3117	88
89813	14.13	14.75	3356	90
89814	14.75	14.75	-	91
89814N	14.75	15.38	3597	92
89815	15.38	16.00	3842	95
89816N	16.00	16.00	-	96
89817	16.00	16.63	4089	97
89818	16.63	17.25	4338	99
89818N	17.25	17.25	-	100
89819	17.25	17.88	4590	102
89820	17.88	18.50	4844	104

**Custom invert minimum of 4"

* Regularly furnished unless otherwise specified

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov**⚠ ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov**⚠ AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. F
Date: 04/07/2022
C.N. No. 144324
Prod. | Dwg. No. Z898