




Z-536
8" [203mm] DIAMETER
HEAVY-DUTY ADJUSTABLE FLOOR DRAIN

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

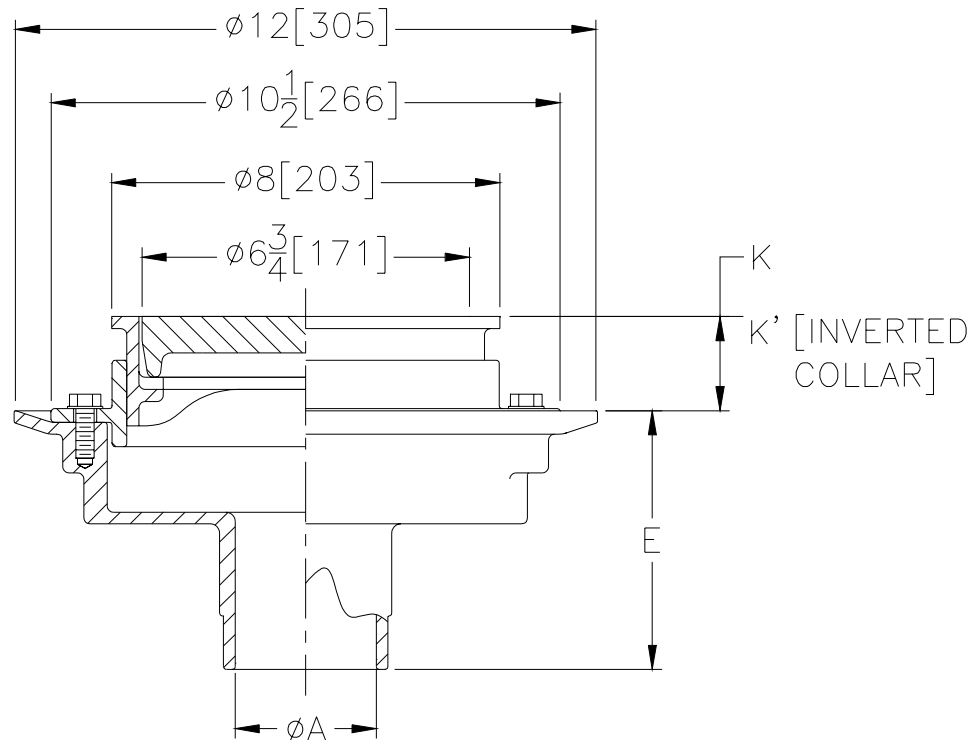

Dimensions In Inches / [mm]					Approx. Wt. Lbs. / [kg]	Grate Open Area Sq. In. / [sq cm]
A Pipe Size Inches / [mm]	K		K'			
	Min.	Max.	Min.	Max.		
3-4-6 [76-102-152]	1-1/2 [38]	2-1/4 [57]	2-1/4 [57]	3 [76]	29 [13]	17 [112]

ENGINEERING SPECIFICATION: ZURN Z-536 8" [203mm] diameter heavy-duty adjustable floor drain, Dura-Coated cast iron bottom outlet body, invertible clamping collar, adjustable leveling frame, and deep grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6 [50 thru 150]
2 thru 6 [50 thru 150]
2 thru 6 [50 thru 150]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

5 1/4 [133]
3 3/4 [95]
5 1/4 [133]
4 5/8 [117]

PREFIXES

_____ Z- D.C.C.I. Body with Grate*
_____ ZN- D.C.C.I. Body with Polished Nickel Bronze Top*

*Add 3/16" [5mm] to Min./Max. Dimension

SUFFIXES

_____ -F0 3-1/2" x 9" [89 x 229] Funnel
_____ -G Galvanized
_____ -P 1/2" [13mm] Trap Primer Connection
_____ -VP Vandal-Proof Secured Top
_____ -Y Sediment Bucket

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 1/21/00 C.N. NO. 84099

DWG. NO. 63662 PRODUCT NO. Z-536