

**Z1201-N_4-XH**

EXTRA-HEAVY-DUTY - 750 lbs [340kg]


EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE

SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

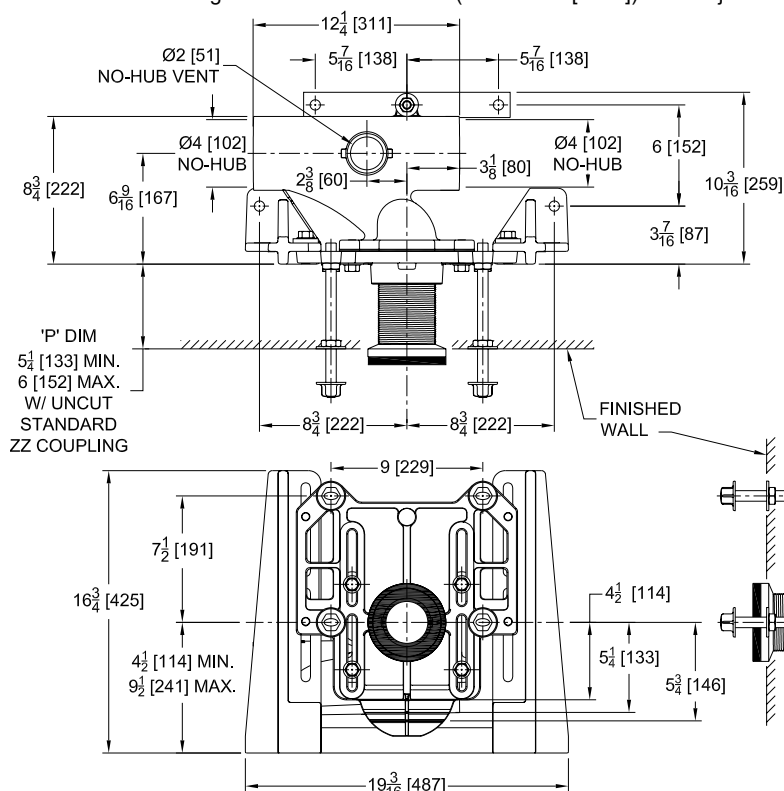

Product Number	Approx. Wt. Lbs. [kg]
Z1201-NL4-XH	84 [38]
Z1201-NR4-XH	

Notes:

1. Z coupling, Min. 'P' Dim. Obtainable=2 [51].EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor assembly required for secure installation.
4. Floor anchors must each be able to withstand a pull-out force of 820 lbs [372 kg].
5. Pull-out forces are calculated values with standard coupling assembly. No safety factor has been applied. See Form # C38 for more information.

Z1201-NR4-XH Illustrated**ENGINEERING SPECIFICATION: ZURN Z1201-N_4-XH**

EZCarry® Extra-Heavy-Duty horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 4" [102 mm] no-hub connections, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gasket optimizes flow performance while reducing installation steps. Complete system includes an adjustable faceplate, QuickFit™ faceplate gasket, floor mounted foot supports; extra-heavy-duty 1/2" [13 mm] rear anchor tie down; fixture bolts, trim, and stud protectors. EZCarry® XH system complies with all applicable requirements of ASME A112.6.1M up to a 750 lbs [340 kg] maximum static load.

OPTIONS (Check/specify appropriate options)

- ____ Z1201-NL4-XH 4 [102] No-Hub Left Hand Inlet with Flow to Right
____ Z1201-NR4-XH 4 [102] No-Hub Right Hand Inlet with Flow to Left

PREFIXES

- ____ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*
____ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- | | | | |
|----------|---|----------|--|
| ____ -CC | Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305]) | ____ -G | Galvanized Cast Iron |
| ____ -CE | EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom) (NPT 12 [305] or custom) | ____ -JC | 2 [51] Auxiliary Inlet with 1/8 [3] Bend |
| ____ -CL | Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305]) | ____ -VP | Vandal-Proof Trim |
| ____ -CS | 2-1/4 [57] Polymer Coupling with Integral Test Cap (ZZ Coupling Only) | ____ -45 | Finishing Frame for Siphon Jet System |
| | | ____ -50 | Flush Valve Supply Support for Water Closets |
- * Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. G
Date: 06/25/24
C.N. No. 146096
Patent zurn.com/patents
Prod. | Dwg. No. Z1201-N_4-XH

Page 1 of 1